

The SP-8U is an innovative stand-alone fingerprint recorder that can be used in both Time Attendance and Access control applications. It can be used for door access control and as a fingerprint terminal for attendance management system and other software applications. The robust design and highly reliable performance are results of many years of research efforts and extensive testing. It is suitable for Office / Building / Factory / Hotel / Hospital / Bank ...etc

- It adopts advanced North Korean algorithm which is a most mature and stable biometric fingerprint algorithm nowadays
- Fingerprint, password, card, fingerprint+password and fingerprint+card for high security and precision
- RS-233, Rs485 and TCP/IP communication
- Options : embedded Proximity or HID or Mifare card reader USB, backup battery.
- Menu language : English, French, Spanish, Indonesian, Czech Portuguese, Turkish and so on
- 3,000 fingerprint templates, everybody can register 3 fingers even can register 10 fingers.



Sunbeam®


TẶNG PHẦN MỀM TÍNH LƯƠNG TIẾNG VIỆT

(Version 2.0)

Standalone



TCP / IP or RS485 Environment

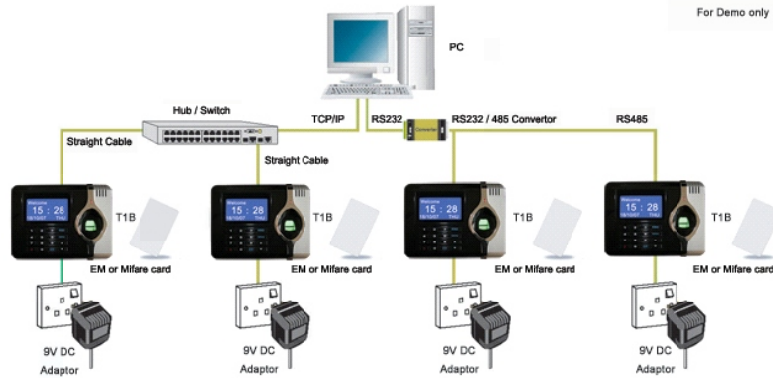

Door Access Control



Specifications

Model	SP-6U
User capacity	3,000
Transaction Storage	80,000
Period of data	Keep data for 3 years when no current
Collecting rate	Port rate(9600BPS, 19200BPS, 38400BPS)
Verification mode	1: N, 1:1
FAR	<0.0001%
FRR	<0.01%
Response time	<0.7 second
Communication	RS232/RS485, TCP/IP, USB
Alarm clock	Embedded alarm clock
External functions	Connect Electronic lock(Access Control)
The capacity of connecting net	31 units (RS485 mode), 255 units (TCP/IP)
Distance	1200m (Rs485)
Show	Time, ID number, Name
Language	English, French, Spanish, Czech, Indonesian and so on
Working mode	Time & attendance, standalone, can working persistently
Time & Attendance mode	Fingerprint, password, card, fingerprint+password fingerprint + card
Save function	Turn off device automatically for saving
Size	170x130x50 mm
Power supply	DC9V, 1A (AC 100V to 240V, 50 to 60Hz)
Warranty of period	12 months
Temperature and humidity	0 - 45, 20% - 80%
Option	Proximity or Mifare card reader, backup battery, USB
Applications	Office / Factory / Bank / Hotel / School etc.

Dealer